




Front view and mounting

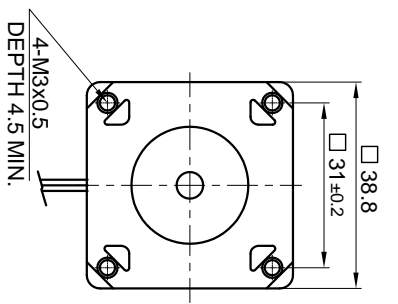

Side view

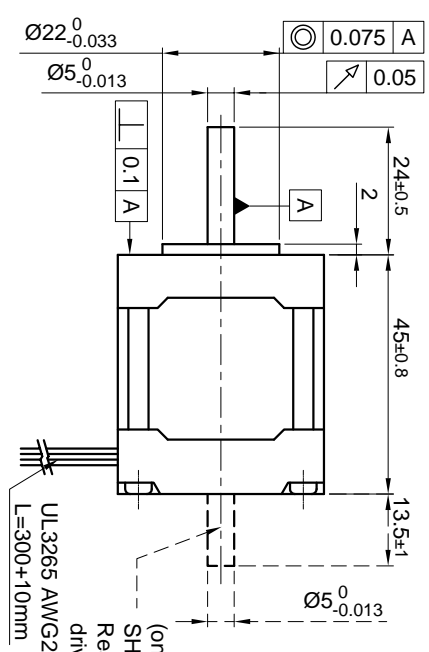


Rear view

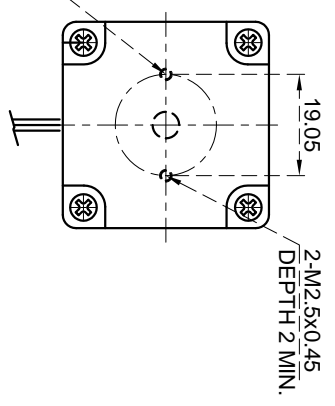

CONNECTION	UNIPOLAR OR BIPOLAR-1 WINDING	BIPOLAR SERIAL
SPECIFICATION		
VOLTAGE (VDC)	4	5.66
AMPS/PHASE	1.2	0.85
RESISTANCE/PHASE (Ohms)@25°C	3.3±15%	6.6±15%
INDUCTANCE/PHASE (mH) @1KHz	5.2±20%	20.8±20%
HOLDING TORQUE (Nm) [lb-in]	0.216 [1.912]	0.305 [2.699]
DETENT TORQUE (Nm) [lb-in]	9.8x10 <sup>-3</sup> [8.673x10 <sup>-2</sup> ]	
STEP ANGLE (°)		0.9
STEP ACCURACY (NON-ACCUM)		±5%
ROTOR INERTIA (kg-m <sup>2</sup> ) [lb-in <sup>2</sup> ]		3.6x10 <sup>-6</sup> [1.23x10 <sup>-2</sup> ]
WEIGHT (kg) [lb]		0.29 [0.639]
TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)		
AMBIENT TEMPERATURE -10°~ 50°C [14°F ~ 122°F]		
INSULATION RESISTANCE 100 Mohm (UNDER NORMAL TEMPERATURE AND HUMIDITY)		
INSULATION CLASS B 130° [266°F]		
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)		
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)		

PERMISSIBLE RADIAL+AXIAL FORCE

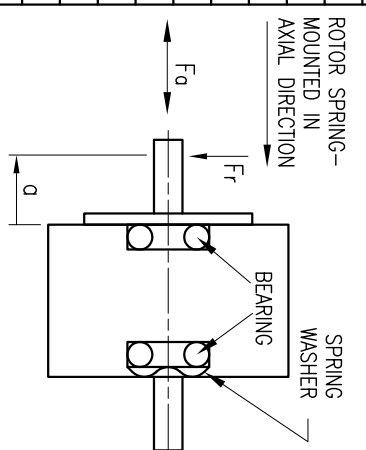


AXIAL-FORCE Fa (N)	Fr=7
DISTANCE a (mm)	5 10 15 20
RADIAL-FORCE Fr (N)	58 36 26 20
AXIAL	
RADIAL	
SHAFT PLAY (mm)	0.075 0.025
AT LOAD MAX: (N)	10 5.0

for >speed for <speed

FULL STEP 2 PHASE-Ex, WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\	CCW
1	+	+	-	-	
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

TYPE OF CONNECTION (EXTERN)		MOTOR	
UNIPOLAR	BIPOLAR	LEADS	WINDING
COM	COM	BRN	A
A	A	BLK	COM
A\	A\	ORG	A\
B	B	RED	B
COM	COM	WHT	COM
B\	B\	YEL	B\

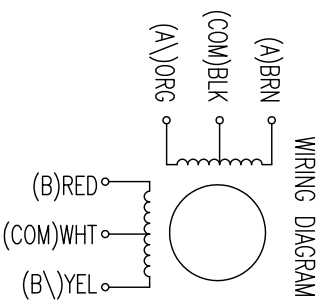

REV	DESCRIPTION	DATE	APVD

NANOTEC:  
SH4009L1206

SCALE	FREE	APVD
X	±0.5	CHKD
1PL	±0.2	DRN
2PL	±0.1	
ANGLE	±30°	

S.K. 20.06.06  
J.W. 20.06.06

STEPPING MOTOR  
DWG.NO SH4009L1206