



Data sheet Version 1.0.0  
 Original: de  
 Nanotec Electronic GmbH & Co. KG Phone: +49 (89) 900 686-0  
 Kapellenstraße 6 Fax: +49 (89) 900 686-50  
 85622 Feldkirchen, Germany info@nanotec.de

**Introduction**


The *NTO4* is an optical rotary encoder for detecting the rotor position of motors. The attachment to a motor is performed by Nanotec.

This data sheet contains the technical data of the encoder and describes its function. You can find information on the combination possibilities with Nanotec motors and other mechanical drawings at [us.nanotec.com](http://us.nanotec.com).

**Variants and article numbers**

The following figure shows the article number key for the variants of the *NTO4*:

**NTO4 - xx - x xx- xx**

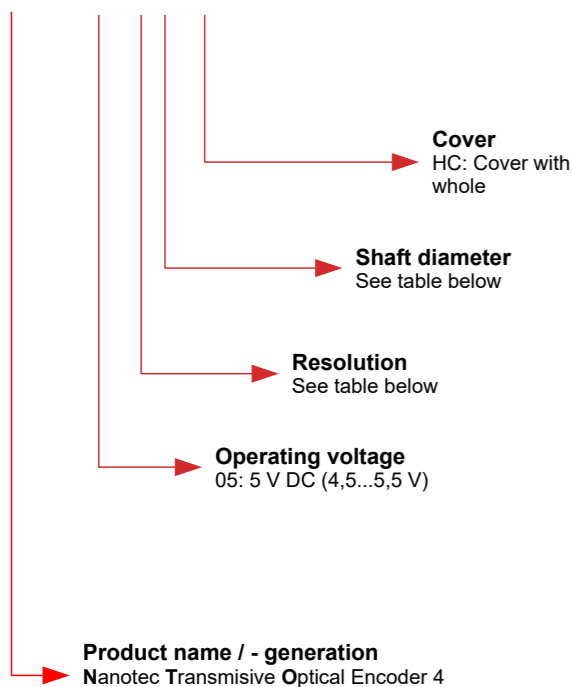

You can find all available items as well as combination possibilities with *Nanotec* motors at [us.nanotec.com](http://us.nanotec.com).

Letter	Resolution
A	500 (2000 [PPR] with quadrature)
B	1000 (4000 [PPR] with quadrature)

Number	Shaft diameter of the motor
06	6.35 mm
12	6 mm
14	5 mm

**Version information**

Data sheet version	Date	Changes	Hardware version
1.0.0	10/2019	Edition	W001

**Copyright**

© 2020 Nanotec Electronic GmbH & Co. KG. All rights reserved.

**Intended use**

The *NTO4* is used as a component of drive systems in a range of industrial applications.

Use the product as intended within the limits defined in the technical data (see **Electrical properties and technical data**) and the approved **Environmental conditions**.

Under no circumstances may this Nanotec product be integrated as a safety component in a product or system. All products containing a component manufactured by Nanotec must, upon delivery to the end user, be provided with corresponding warning notices and instructions for safe use and safe operation. All warning notices provided by Nanotec must be passed on directly to the end user.

**Warranty and disclaimer**

Nanotec assumes no liability for damages and malfunctions resulting from installation errors, failure to observe this manual or improper repairs. The selection and use of Nanotec products is the responsibility of the plant engineer or end user. Nanotec accepts no responsibility for the integration of the product in the end system.

Our general terms and conditions apply: [en.nanotec.com/service/general-terms-and-conditions/](http://en.nanotec.com/service/general-terms-and-conditions/).

Customers of Nanotec Electronic US Inc. please refer to [us.nanotec.com/service/general-terms-andconditions/](http://us.nanotec.com/service/general-terms-andconditions/).



**Note**  
 Changes or modifications to the product are not permitted.

**Target group and qualification**

The product and this documentation are directed towards technically trained specialists staff such as:

- Development engineers
- Plant engineers
- Installers/service personnel
- Application engineers

Only specialists may install, program and commission the product. Specialist staff are persons who

- have appropriate training and experience in work with motors and their control,
- are familiar with and understand the content of this technical manual,
- know the applicable regulations.

**EU directives for product safety**

The following EU directives were observed:

- RoHS directive (2011/65/EU, 2015/863/EU)

**Used icons**

All notices are in the same format. The degree of the hazard is divided into the following classes.



**CAUTION**

**The CAUTION notice indicates a possibly dangerous situation.**

Failure to observe the notice **may** result in moderately severe injuries.

- Describes how you can avoid the dangerous situation.



**Note**

**Indicates a possible incorrect operation of the product.**

Failure to observe the notice may result in damage to this or other products.

- Describes how you can avoid the incorrect operation.



**Tip**

Shows a tip for the application or task.

**Safety and warning notices**



**Note**

**Damage to the electronics through improper handling of ESD-sensitive components!**

The device contains components that are sensitive to electrostatic discharge. Improper handling can damage the device.

- Observe the basic principles of ESD protection when handling the device.


**Technical details and pin assignment**

**Environmental conditions**

Environmental condition	Value
Umgebungstemperatur (Betrieb)	-25... +100°C
Vibration (5 Hz- 2 KHz)	20 G
ESD, IEC61000-4-2	±4 kV

**Dimensioned drawings**


All dimensions are in millimeters.

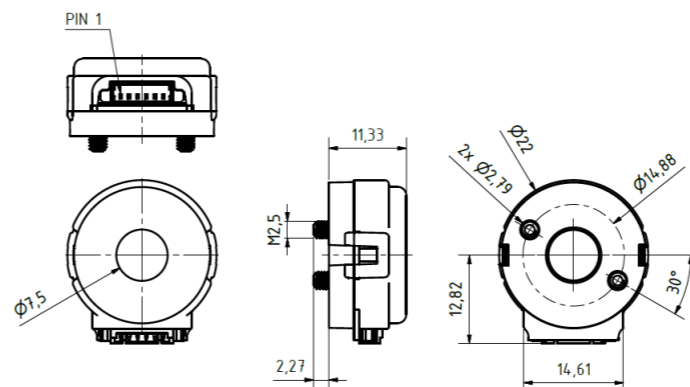

**Pin assignment**

- Type: CON-MIC6
- Mating connector (not included in scope of delivery):
  - Housing: MOLEX 510210600 (or equivalent)
  - Contacts: MOLEX 500798100 (or equivalent)
- Suitable Nanotec cable: ZK-NTO4L-610

In the following figure, pin 1 is marked.



**Incremental encoder**

Pin	Function	Note
1	GND	
2	a	
3	A\	
4	+5 VDC power	
5	B	
6	B\	

The following signal levels apply for differential encoder signals A, A\, B, B\:


High level (load = 25 mA)	Low level (load = 4.5 mA)
≥ 4.75 V	≥ 0.6 V

The rise time is 20 ns, the output fall time is also 20 ns.

**Output signals**

**Incremental output signals**

Counterclockwise when viewing the drive shaft of the motor, the signal of channel A leads channel B by 90° (electrical, typical value).

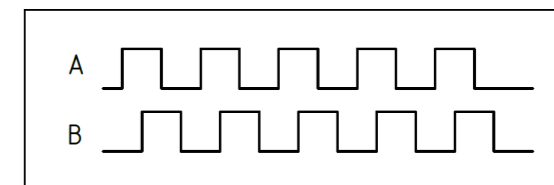

**Electrical properties and technical data**

Property	Description / value
Operating voltage	4.5 ... 5.5 V DC
Typical current consumption (without load)	<ul style="list-style-type: none"> <li>• NTO4x-05-Axx-xx: 27 mA</li> <li>• NTO4x-05-Bxx-xx: 36 mA</li> </ul>
Max. Current consumption (without load)	<ul style="list-style-type: none"> <li>• NTO4x-05-Axx-xx: 32 mA</li> <li>• NTO4x-05-Bxx-xx: 44 mA</li> </ul>
Resolution	<ul style="list-style-type: none"> <li>• NTO4x-05-Axx-xx: 2000 positions per mechanical revolution with quadrature (500 [CPR] without quadrature)</li> <li>• NTO4x-05-Bxx-xx: 4000 positions per mechanical revolution with quadrature (1000 [CPR] without quadrature)</li> </ul>
Maximum mechanical speed	<ul style="list-style-type: none"> <li>• NTO4x-05-Axx-xx: 32: 12000 revolutions/minute</li> <li>• NTO4x-05-Bxx-xx: 44: 6000 revolutions/minute</li> </ul>