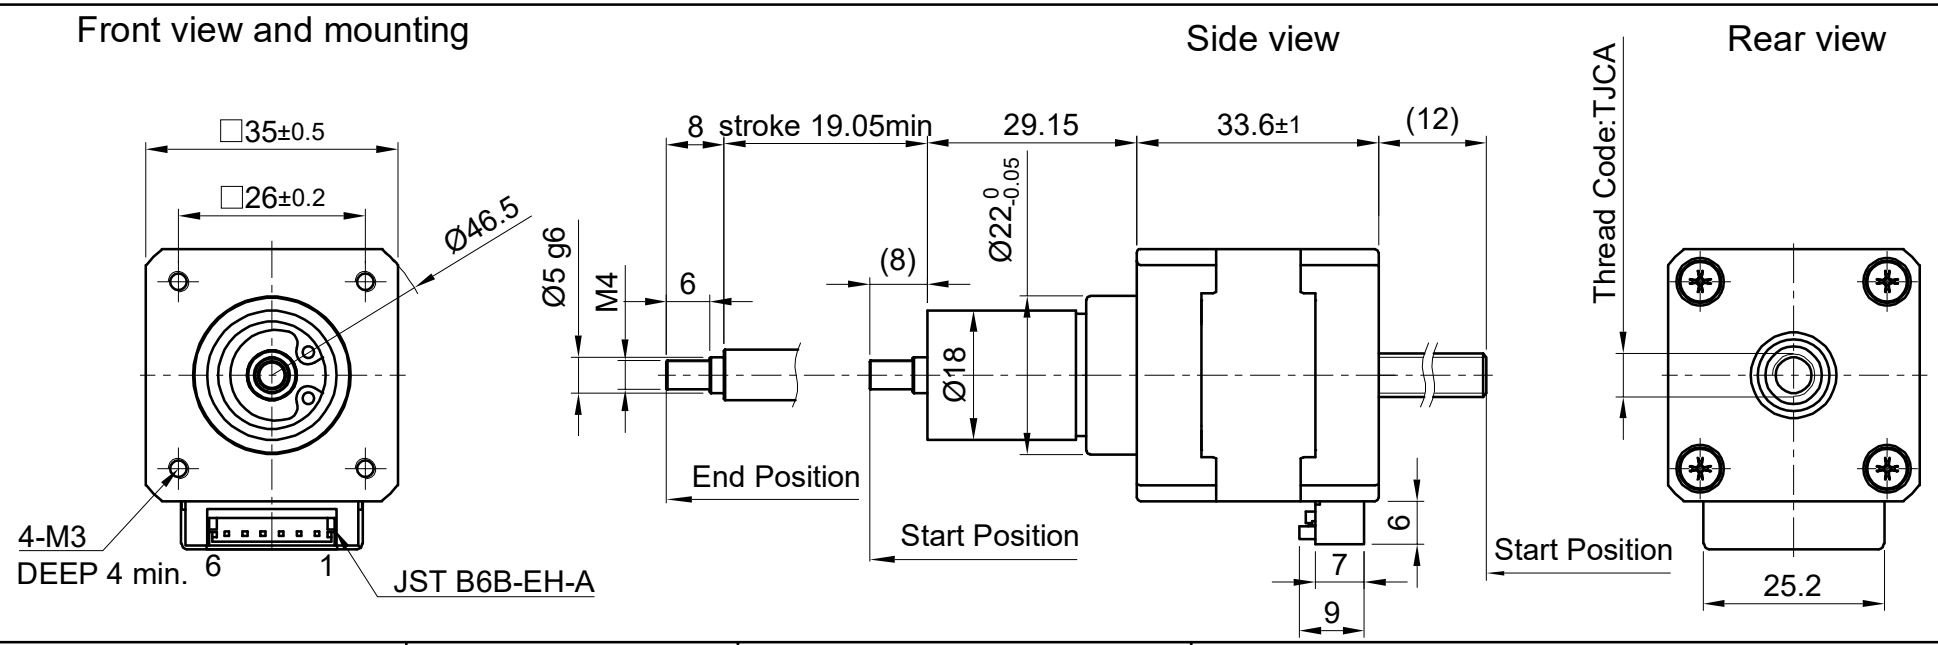

SPECIFICATION \ CONNECTION	BIPOLAR
AMPS/PHASE	1.2
RESISTANCE/PHASE (Ohms)@20°C	1.85±15%
INDUCTANCE/PHASE (mH) @1KHz	2.46±20%
THREAD DIAMETER (mm) [in]	6 [0.236]
THREAD LEAD(mm) [in]	2 [0.079]
RATED FORCE (N)/MAX. FORCE (N)	69 / 156
RESOLUTION (mm/STEP)	0.01
MAX. SPEED (mm/sec.) AT 24V	33
WEIGHT (Kg) [lb]	0.19 [0.42]
TEMPERATURE RISE: MAX.80°C (MOTOR STANDSTILL; FOR 2 PHASE ENERGIZED)	
AMBIENT TEMPERATURE −10°~ 50°C [14°F ~ 122°F]	
INSULATION RESISTANCE 100 MOhm (UNDER NORMAL TEMPERATURE AND HUMIDITY)	
INSULATION CLASS B 130° [266°F]	
DIELECTRIC STRENGTH 500VAC FOR 1 MIN. (BETWEEN THE MOTOR COILS AND THE MOTOR CASE)	
AMBIENT HUMIDITY MAX. 85% (NO CONDENSATION)	

Please regard the application note at www.nanotec.com for further informations.

MOTOR	
CONNECTOR PIN NO.	WINDING
1 (NC)	
2	A
3	A\
4	B
5	B\
6 (NC)	

FULL STEP 2 PHASE–Ex.,
WHEN FACING MOUNTING END (X)

STEP	A	B	A\	B\		CCW
1	+	+	−	−	↓	↑
2	−	+	+	−		
3	−	−	+	+		
4	+	−	−	+	CW	

WIRING DIAGRAM



REV	DESCRIPTION	DATE	DRN
A	Change force and speed etc.	17.10.25	X T

Nanotec® PLUG & DRIVE

Surface specification DIN ISO 1302 | General tolerances DIN ISO 2768-c | Work piece edge DIN ISO 13715

		SIGNATURE	DATE
APVD	P.R.		04.06.19
CHKD	GYQ		04.06.19
DRN	X T		04.06.19

LINEAR ACTUATOR

DWG.NO LGA351S12–A–TJCA–019